




3-LED DECK LIGHT - FLAT MOUNT

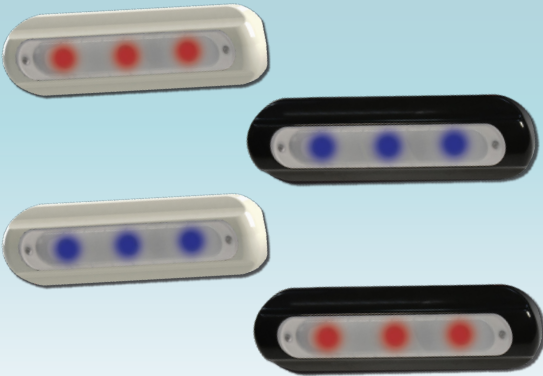

Unique, low profile LED multi-purpose deck light designed for flat mount. Ideal for hard tops, leaning posts, consoles, interior cabin, under gunnel, bait wells as well as campers and RV's.

FEATURES & BENEFITS


- Compact design bolts directly to any flat surface 5-inch long and 1-3/8-inch width
- Available mounting options included: stainless-steel swivel bracket or 3M adhesive tape
- Wire chafe guards included for running wires through tube or pipe
- Powerful 540 lumen output with 100° spread beam angle
- Very low power consumption (.6 amps @ 12 volts)
- Available in Blue or Red LED with Black or White housing
- USCG, ISO and SAE certified for Ignition Protection*
- 8.0 watts equivalent to a 55 watts halogen flood light
- 8-foot hidden power cable
- 12-24 volts applications

MATERIAL CHARACTERISTICS

- High impact, UV-resistant, light weight white or black Polycarbonate housing
- Durable and self-extinguishing clear plastic lens
- LED chips are silicone potted for IP67-waterproof (non-submersible) anodized aluminum heatsink



Stainless-steel Swivel Bracket with 60° pivoting rotation

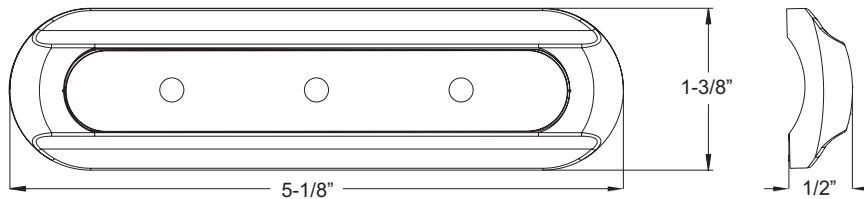

Dimensions shown in inches

* Completely sealed lights have been tested in an explosive environment and exposed to an explosive atmosphere in high temperature that includes powering on-off 50 times without igniting the atmosphere at a temperature not exceeding 200°C. These certificates demonstrate the ability to consistently provide product that meets statutory and regulatory requirements that assure customer satisfaction and safety. Ideal for use in engine rooms, battery compartments and anywhere fire safety is of most importance.

PART NUMBER	DESCRIPTION	LED COLOR	LED HOUSING	UNIT	PACK	UPC
F38-8500B-1	LED Deck Light - Flat Mount	Blue	White	Each	6	630838084011
F38-8500R-1	LED Deck Light - Flat Mount	Red	White	Each	6	630838084029
F38-8505B-1	LED Deck Light - Flat Mount	Blue	Black	Each	6	630838087760
F38-8505R-1	LED Deck Light - Flat Mount	Red	Black	Each	6	630838087753